

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/71834 A2

- (51) International Patent Classification⁷: **E04D 5/00**
- (21) International Application Number: **PCT/US00/14487**
- (22) International Filing Date: **25 May 2000 (25.05.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/320,049 **26 May 1999 (26.05.1999)** **US**
- (71) Applicant (for all designated States except US): **BASF CORPORATION [US/US]; Sabourin, Anne, Gerry, Patent Department, 26701 Telegraph Road, Southfield, MI 48034-2442 (US).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ALLMAN, Jack [US/US]; 1500 Dietrick Drive, Twin Lakes, WI 53181 (US). LEWARCHIK, Ronald [US/US]; 706 Pimlico Parkway, Sleepy Hollow, IL 60118 (US). SCARICAMAZZA, Victor [US/US]; 2 North Deer Place, Mount Holly, NJ 08060 (US).**
- (74) Agents: **SABOURIN, Anne, Gerry et al.; BASF Corporation, 26701 Telegraph Road, Southfield, MI 48034-2442 (US).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:**
— *Without international search report and to be republished upon receipt of that report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



WO 00/71834 A2

(54) Title: **METAL ROOFING SHINGLE STOCK AND METHOD FOR MAKING IT**

(57) Abstract: This invention relates to a method for embedding a multiplicity of discrete masses of material in a resinous coating on a sheet of metal in a coil coating system. The sheet is coated, the masses are embedded in the wet resinous coating, and the coating is dried in a one-pass system. The resinous coating and the embedded masses are preferably resistant to ultra-violet radiation. The wet resinous coating, therefore, is preferably a liquid fluorocarbon resin. The discrete masses comprise pigmented particulate minerals and resins in the form of granules, beads, vesiculated beads, pellets, flakes, platelets, cylinders, coating powders, and coating powder precursor chips. The minerals include glass, quartz, mica, pebbles, and ceramics. The particulate resins include polyesters, acrylics, nylons, polyurethanes, polycarbonates, solid fluorocarbon resins, and solid mixtures of a fluorocarbon resin and an acrylate or methacrylate polymer or copolymer. Sheet metal decorated in such a manner is useful as stock in the manufacture of metal roofing shingles simulating the appearance of traditional asphalt shingles.

METAL ROOFING SHINGLE STOCK AND METHOD FOR MAKING IT

5

FIELD OF THE INVENTION

This invention relates to a method for embedding a multiplicity of discrete masses of material in a resinous coating on a sheet of metal in a coil coating system. More particularly, it relates to a one-pass system wherein the sheet is coated, the masses are embedded in the wet resinous coating, and the coating is dried. It further relates to a coil of metal decorated with said embedded masses. It relates particularly to the decoration of sheet metal so that it is useful as stock in the manufacture of metal roofing shingles simulating the appearance of traditional asphalt shingles. To that end, this invention relates to coil coated sheet metal to which the coating adheres sufficiently well to permit post-coating forming, molding, bending, and shaping of the metal without delamination or flaking of the coating. It further relates to coil coated sheet metal on which the resinous coating is resistant to ultra-violet radiation and the embedded masses are ultra-violet resistant color bodies of various hues. The surface of the coating may be substantially free of protrusions but at least a portion of the discrete masses may protrude above the surface of the coating to impart slip resistance to shingles made from the coated stock.

30

BACKGROUND OF THE INVENTION

Mineral covered asphalt sheets, by far the most commonly used shingles, are sold with guarantees of from 15 to 30 years depending on the weight per 100 square feet. The mineral granules are gradually dislodged by wind and rain to expose the asphalt binder to the destructive effects of ultra-violet light. Because of an increasing desire to replace the asphalt with a substrate that has a much longer useful life - on the order of about 60 to 80 years - the development of metal roofing shingles has become more and more important. STONECREST Steel Shingles having multilayered coatings are made from a combination of steel, aluminum, and zinc by Metal Works of Pittsburgh. The cost of simulating the appearance of mineral covered asphalt shingles by forming shingles from coated sheet metal stock may in part be reduced to a commercially acceptable level by reducing the number of coating steps and the corresponding time.

In a conventional coil coating system, paint is picked up by a roller rotating in a paint pan and transferred to an applicator roller and a coil of sheet metal is uncoiled as the metal is pulled through a series of rollers, one or more of which is a paint applicator roller, at up to 1000 feet per minute. The coated metal is then passed through an oven for drying or curing and coiled again. The sheet is passed through the system each time a separate coating layer is to be applied.

To the knowledge of the instant inventors, none of the many patents directed to coil coating teach the coating of a face of sheet metal with a resinous composition and embedment of a second coating material
5 in the wet surface of that coating in a single pass of the metal through a coil coating system. Several patents teach the coating of moving flexible substrates with two materials. The principal substrates are sheets of asphalt, PVC and fabric but metal is often mentioned as
10 a potential substrate. U.S. Patent 5,827,608, for example, teaches the electrostatic fluidized bed application of a coating powder (e.g., a blend of two distinct, chemically incompatible resins) onto the underside of a vinyl sheet being drawn from a coil at
15 about 4 feet per minute, heating the powder and pressing it to fuse and bond it to the vinyl, and rewinding the coated sheet into a coil.

SUMMARY OF THE INVENTION

20 It is an object of this invention, therefore, to provide a coil of sheet metal having a resinous coating on one face and a multiplicity of discrete masses of material embedded in said coating.

It is another object of this invention to provide
25 metal roofing shingle stock having a resinous coating on one face and a multiplicity of discrete masses of material embedded in said coating.

It is a related object of this invention to provide metal roofing shingle stock having a multiplicity of discrete color bodies embedded in a resinous coating.

It is another object of this invention to provide a
5 method for coating one face of sheet metal with a resinous composition and embedding a particulate coating material in the wet surface of that coating during one pass of the metal through a coil coating system.

These and other objects of this invention which
10 will become apparent from the appended drawings and the following description are achieved in one embodiment of the invention by a method for coating sheet metal which comprises unwinding the sheet metal from a coil thereof and directing the sheet metal through a series of
15 rollers, one or more of which is an applicator roller, placing a liquid resinous coating composition in a paint pan, picking up said resinous coating composition on a rotating roller in the pan and and transferring it to an applicator roller; thenceforth transferring it as a
20 protective coating to the moving sheet metal, distributing discrete masses of material uniformly on the liquid or at least plastic protective coating and causing at least a portion of them to submerge at least partially in said protective coating, drying said
25 protective coating, and rewinding the coated metal sheet into a take-up coil. The method of this invention is characterized by distributing the discrete masses to form a discontinuous field coextensive with the area of

the coating, thus simulating the appearance of conventional asphalt-based shingles.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Fig. 1 is a schematic drawing of a coil coating line suitable for the distribution of color bodies on wet resinous coated sheet metal moving on the line.

 Fig. 1a is perspective view of one embodiment of the particle distributor of Fig. 1.

10 Fig. 1b is a perspective view of another embodiment of the particle distributor of Fig. 1.

 Fig. 2 is a schematic drawing of a flame spray system for projecting fused particles onto wet resinous coated sheet metal moving on a coil coating line.

15 Fig. 3 is a plan view, partially broken away, of a flame spray gun for the system of Fig. 2.

 Fig. 4 is a schematic drawing of a coil coating line suitable for the distribution of ceramic granules on wet resinous coated sheet metal and the interleaving
20 of a backing sheet with the coated sheet metal as it is rewound on a take up coil.

DETAILED DESCRIPTION OF THE INVENTION

 As used herein, substantially means largely if not
25 wholly that which is specified but so close that the difference is insignificant.

 In the coil coating operation of this invention, substantially the full expanse of an aluminum or galvanized steel sheet is coated as it travels at 250-

1000 feet per minute. Hot dipped galvanized (HDG) steel is suitable for low cost operations but a zinc/aluminum alloy such as that sold under the trademark GALVALUME is preferred for its corrosion resistance. Aluminum is more
5 preferred when cost is not a limiting factor.

Pretreatment of the metal is important for increased corrosion protection and adhesion of the coatings. Typical conversion coating compositions used in the pretreatment include those sold under the trademarks
10 BONDERITE 1303 or 1310 for the GALVALUME metal, and BETZ 1500 and Morton's FIRST COAT for aluminum.

For optimum adhesion and corrosion resistance, it is preferable that the metal is coated with a primer over the conversion coating. Suitable primers for this
15 invention include epoxy, acrylic, polyester, or polyurethane resins as binders. U.S. Patent No. 5,001,173 is incorporated herein by reference for its description of primers that are suitable here. The primer thickness may be from 0.2 mil to 1.6 mils,
20 preferably about 0.8 mil or more. Flexible primers are preferred when the coated metal stock is to be post formed in the manufacture of a roofing shingle. Greater flexibility may be achieved by the use of thick film primers such as are described in U.S. Patent No.
25 5,688,598, which is incorporated herein by reference, and are available from Morton International, Inc. The peak metal temperature (PMT) for the curing of the primer is that recommended by the supplier but it is usually in the range of 435-465°F (about 225-240°C).

Pigments such as those described below in regard to the topcoat and embedded particles are used to impart ultraviolet light resistance to the primers also.

For the purposes of this invention, the liquid
5 resinous coating composition preferably comprises an ultraviolet light resistant pigment and a thermoplastic or thermosettable fluorocarbon resin. As used herein, a fluorocarbon resin is a homopolymer of vinyl fluoride or vinylidene fluoride or a copolymer of either of those
10 two monomers with one another and/or other copolymerizable, fluorine-containing monomers such as chlorotrifluoroethylene, tetrafluoroethylene and hexafluoroethylene. Fluorocarbon resins are available under the trademarks KYNAR and HYLAR. Fluorocarbon
15 resins and coating compositions comprising a fluorocarbon and an acrylate or methacrylate monomer or mixture of the two are described in U.S. Patent No. 5,185,403, which is incorporated herein by reference. Coating compositions particularly suitable for the
20 purposes of this invention are, available under the trademark FLUOROCERAM. A mixture of a vinylidene fluoride/chlorotrifluoroethylene copolymer (55:45 by weight percent) and methylmethacrylate (MMA) wherein the weight ratio of the MMA to the copolymer is from about
25 2:1 to about 5:1 is also suitable.

A fluoropolymer particularly suited to the top coating over the conversion coating on unprimed sheet metal is described by Yamabe et al in U.S. Patent No. 4,345,057. Commercially available fluoropolymer resins

which are believed to be substantially similar to those described in the Yamabe et al patent include those sold under the trademarks ICI 302, ICI 504, and ICI 916. For the purposes of this invention, the word "drying" is
5 used to mean the solidification of molten material and the curing of thermosettable resins as well as the evaporation of solvents. The thickness of the liquid resinous coating is such that it forms a 0.5 to 1.0 mil thick dry coating, preferably one that is about 0.8 mil
10 or greater, to provide sufficient holding power for the discrete masses of submerged particulate material. It is preferable that the liquid resinous coating is still wet so as to promote the submergence and bonding of the discrete masses but a baked coating which is not fully
15 cured may serve when softened as a plastic medium for the submergence of such particulate material. Thus, for the purposes of this invention, the term "liquid resinous coating" is defined to include a coating which is sufficiently plastic to be susceptible to penetration
20 by a particulate material under the conditions of this invention without otherwise fracturing the coating. When the particulate material is a resin, it is suitable for the purposes of this invention to fuse the resin and cause it to merge with the protective coating. In some
25 cases, such as when the particulate material is a thermosettable coating powder or an uncured thermosettable resin in some other form such as a chip, concurrent curing of the liquid protective coating and the particulate material may take place. The curing

temperature for the fluoropolymers is usually at a PMT in the range of 465-480°F (about 240-280°C). The discrete masses of particulate material must, therefore, be able to withstand such high temperatures.

5 As used herein, the term "discrete masses" means individual particles of material as well as masses of particles such as are used in powder gravure coating processes and includes discrete color bodies as well as colorless particles. Pigmented particulate minerals and
10 resins in the form of granules, beads, vesiculated beads, pellets, flakes, platelets, cylinders, coating powders, and chips such as coating powder precursor chips are suitable as discrete color bodies for the purposes of this invention. The minerals include glass,
15 quartz, mica, pebbles, and ceramics. The particulate resins include polyesters, acrylics, nylons, polyurethanes, polycarbonates, solid fluorocarbon resins, and solid mixtures of a fluorocarbon and a polymer or copolymer of the acrylate or methacrylate
20 monomers as described above in regard to the liquid resinous coating. Amorphous acrylic/styrene/acrylonitrile resins sold by General Electric under its GELOY trademark, noted for durability in weather related environments, are suitable for the purposes of this
25 invention. The preferred granules are aggregates sold under the trademark COLORQUARTZ by 3M. The preferred spherical S grade granule has a particle size range of 20 to 70 (U.S. Sieve), which is about 8 to 30 mils. The resin particles are likewise about 8 mils or larger.

Chips intended to be ground for conversion into coating powders, referred to hereinabove as coating powder precursor chips, are themselves quite suitable as the discrete color bodies for this invention.

5 Simulation of the asphalt shingle appearance may be achieved by contiguous discrete masses of different colors, by spacing of the masses by at least as much as the individual particle sizes, or both.

 The pigments impart ultraviolet light resistance to
10 the primer, the topcoat and the embedded color bodies and yield aesthetic effects. Most of the UV resistant pigments are metal oxides; examples of such include those sold as DUPONT Ti Pure R- 960, COOKSON KROLOR KY- 795 Med. Yellow (2), COOKSON KROLOR KY- 281D Lt. Yellow
15 (2), COOKSON KROLOR RKO 786D Orange (2), COOKSON KROLOR RKO 789D Orange (2), SHEPHERD # 1, SHEPHERD Yellow #29, ISHIHARA Titanium Golden, FERRO V9118 Bright Golden Yellow, Golden Brown #19, SHEPHERD #195 Yellow, HARCROSS Red Oxide R-2199, HARCROSS KROMA Red Oxide RO-8097,
20 HARCROSS KROMA Red Oxide RO-4097, G-MN chrome oxide, and FERRO V-302. COLUMBIA RAVEN 1040 carbon black and the COOKSON A-150D laked black exemplify the non-metal oxide pigments which impart UV resistance to the top coat and embedded particles. A phthalocyanine green pigment
25 sold as MONASTRAL Green GT-751D (5) is a UV resistant organometal pigment suitable for the purposes of this invention.

 The amount of pigment used in each situation will vary according to the depth of coloration and UV

resistance desired and according to the properties of the various pigments chosen.

The discrete masses of material embedded in the protective top coating may be made cellular in structure by the incorporation of blowing agents in their formulations in amounts such as are just sufficient to cause expansion of the particles while preferably avoiding perforation of the particles at temperatures up to and including 280°C (~480°F). An amount ranging from about 0.1 to about 3% by weight of the resin is satisfactory, the actual amount depending upon the particular foaming agent, the particular resin, the coating temperature, and the expansion desired. Blowing agents such as p-toluene sulfonyl hydrazide, 2,2'-azobis(isobutyronitrile), and azocarbonamide are suitable.

EMBODIMENTS OF THE INVENTION

In Fig. 1, the coil 10 of sheet metal 11 is operatively, disposed on the unwinding device 12, from which the sheet travels, through a pre-cleaning unit (not shown) and the first accumulator 13 of a conventional coil coating line. After leaving the first accumulator, the metal sheet 11 travels around rolls 14 and 15 to contact the applicator roll 16 of the pretreatment coater and through the drier 17 before it passes through the prime coater 18, the backing coater 18a, and drier 19. The sheet 11 is then passed through the applicator 20 where the liquid resinous coating

composition 21 in the pan 22 is picked up by the roll 23, transferred to the applicator roll 24, and deposited on the metal as the wet top coat 25. The wet coated metal is then passed under the distributor 26 from which
5 discrete masses 27 of organic or inorganic material are distributed uniformly on the wet resin. The coated sheet metal then travels through the oven 28, a set of pressure rollers 29 when necessary for the embedment of the masses 27, a quench unit (not shown), and the second
10 accumulator 30 before it is taken up again on the rewind coil 31.

A particular embodiment of the distributor 26 of Fig. 1 is illustrated in Fig. 1a by the combination of the hopper 32 which feeds particulate matter into the
15 multiplicity of pockets 34 engraved in the surface of the cylindrical roll 36 which rotates at a velocity matching the linear velocity of the metal sheet passing through the coil coating line. The engraved area of the roll corresponds to the width of the top-coated metal
20 sheet 25 and the pockets are spaced apart to achieve the desired density of particulate matter on the wet topcoat. A static mixer available from 3M is particularly suitable as the hopper 32 for feeding granules to the roll 36.

25 Another embodiment of the invention is shown in Fig. 1b, wherein the discrete masses 27 are gravity fed from the hopper 40 onto the motorized continuous conveyor belt 42, which is disposed a short distance above the top-coated metal sheet 25. The belt 42 travels

in the same direction and at the same linear velocity as the metal sheet as the masses 27 drop onto the sheet 25. The sheet and the conveyor belt 42 are disposed for a short distance within the trough 43 which collects any
5 discrete masses 27 which fall from the conveyor but miss or fall off of the sheet. Such discrete masses thus collected in the trough may be returned to the hopper 40 by conventional means such as a blower situated within tubing connecting a chute in the trough and the hopper.

10 In another embodiment of this invention, the distributor 26 of the coil coating line of Fig. 1 is replaced by the flame sprayer 44 shown in Fig. 2. Here, the topcoat on the metal sheet 25 is a thermoplastic resin which retains sufficient heat as it leaves the
15 oven 45 to remain soft. Particles of a thermoplastic resin are fed into the sprayer 44 disposed adjacent the ascending sheet 25. The sprayer instantly heats the particles to a molten or plastic state and propels the particles onto the surface of the still soft
20 thermoplastic coating on the sheet 25 at a speed of about 30 to 60 feet per second, forming flattened plastic particles called splats which range from 0.5 mil to 4 mils in diameter. The size of the particles being fed into the sprayer 44, the distance from the sprayer
25 to the surface of the top-coated sheet 25, and the rate of feed are controlled so that the flattened particles remain as uniformly distributed discrete masses in the top coat over substantially the full expanse of the coated metal sheet 25.

A plurality of flame spray guns 46, each spraying particles of a different color, may be mounted in the flame sprayer 44 so as to form a multiplicity of splats over all or some lesser desired portion of the sheet metal surface. Flame spray gun 46 as illustrated in Fig. 3 has a body 47 with supply channels 48, 49, and 50 for air, fuel gas, and a fluidized coating powder, respectively. Channel 50 communicates with a fluidizing chamber (not shown) from which a coating powder suspended in a stream of compressed air is pushed intermittently into the flame spray gun 46 by rapidly opening and closing a valve in a supply line carrying a stream of compressed air and coating powder into the fluidizing chamber. The outlet of the powder channel is axially disposed within the gun mouthpiece 51 and combustion gas outlet nozzles 52 are situated in the mouthpiece 51 at equal distances around an imaginary circle concentric with the powder channel 50. The amounts of air and gas are regulated by valves 53 and 54. The air passes through the ejectors 55 creating a partial vacuum in the fuel gas channel 49 and drawing the gas into the mixing chambers 56. The combustible mixture flows through the mouthpiece nozzles 52 and burns. The powder particles are heated to a molten state as they pass quickly through the flame.

As illustrated in Fig. 4, when discrete masses 27 of Fig. 1 such as ceramic granules or the like protrude above the resinous top coat, a removable backer sheet 60 is drawn from the coil 61 and interleaved with the

granule covered metal sheet 62 as it is rewound into the coil 63 in order to protect the underside of the sheet metal. The backer sheet 60 may be made of a foamed material such as polystyrene or poly (vinyl chloride).

The subject matter claimed is:

1. A coil of sheet metal having a resinous coating and a multiplicity of discrete masses of material embedded in said coating.
- 5 2. The coil of claim 1 wherein the coating is resistant to ultra-violet radiation.
3. The coil of claim 2 wherein the discrete masses are color bodies.
4. The coil of claim 3 wherein the color bodies are
10 resistant to ultra-violet radiation.
5. The coil of claim 3 wherein the color bodies extend substantially over the entire area of the coating.
6. The coil of claim 2 wherein the ultra-violet radiation resistant coating is a fluorocarbon resin.
- 15 7. The coil of claim 1 wherein at least a portion of the discrete masses protrude above the surface of the coating.
8. The coil of claim 1 wherein the surface of the coating is substantially free of protrusions.
- 20 9. The coil of claim 7 wherein the discrete masses are granules of inorganic material.
10. The coil of claim 7 wherein the discrete masses are masses of an organic resin.
11. The coil of claim 8 wherein the discrete masses are
25 masses of colored organic resin.
12. The coil of claim 3 wherein the color bodies are granules of inorganic material.
13. The coil of claim 3 wherein the color bodies are masses of an organic resin.

14. The coil of claim 7 characterized further by alternating layers of coated metal and a backing material.

15. The coil of claim 13 wherein the masses of organic resin are resistant to ultra-violet radiation.

16. The coil of claim 1 characterized further by a primer beneath the resinous coating.

17. A coil of sheet metal having alternating layers of coated metal and a backing material, said coated metal having a primer, an ultra-violet resistant resinous coating over the primer, and a multiplicity of ultra-violet radiation resistant granules embedded in and protruding from said resinous coating.

18. A coil coating system for embedding discrete masses of material in a resinous coating on sheet metal as it is pulled from a dispensing coil through a series of rollers, one or more of which is an applicator roller, said system comprising a paint pan, a liquid resinous coating composition contained by the paint pan, a roller rotating in the pan and picking up said resinous coating composition and transferring it to an applicator roller; thenceforth to the moving sheet metal, and a distributor for depositing said discrete masses of material uniformly on the liquid coating as the sheet metal is moving, causing at least a portion of them to submerge at least partially in said liquid coating, and a dryer.

19. The system of claim 1a characterized further in that the sheet metal is rewound into a coil after passing through the dryer.

20. The system of claim 19 characterized further by pulling a backer sheet from a dispensing coil thereof and interleaving it with the coated sheet metal as the metal is rewound.

5 21. The system of claim 18 wherein substantially all of the masses are caused to submerge in the liquid coating.

22. A method for coating sheet metal which comprises unwinding the sheet metal from a coil thereof and directing the sheet metal through a series of rollers,
10 one or more of which is an applicator roller, placing a liquid resinous coating composition in a paint pan, rotating a roller in the pan and picking up said resinous coating composition and transferring it to an applicator roller; thenceforth to the moving sheet
15 metal, and distributing discrete masses of material uniformly on the liquid coating and causing at least a portion of them to submerge at least partially in said liquid coating; and drying said liquid coating.

23. The method of claim 22 characterized further by
20 distributing the discrete masses to form a discontinuous field coextensive with the area of the coating.

24. The method of claim 22 characterized further by distributing discrete masses of material which protrude above the surface of the coating.

25 25. The method of claim 24 further characterized by rewinding the sheet metal after the drying step into a coil.

26. The method of claim 22 wherein the discrete masses are coating powder precursor chips.

27. The method of claim 25 characterized further by pulling a backer sheet from an unwinding coil thereof and interleaving it with the coated sheet metal as the metal is rewound.



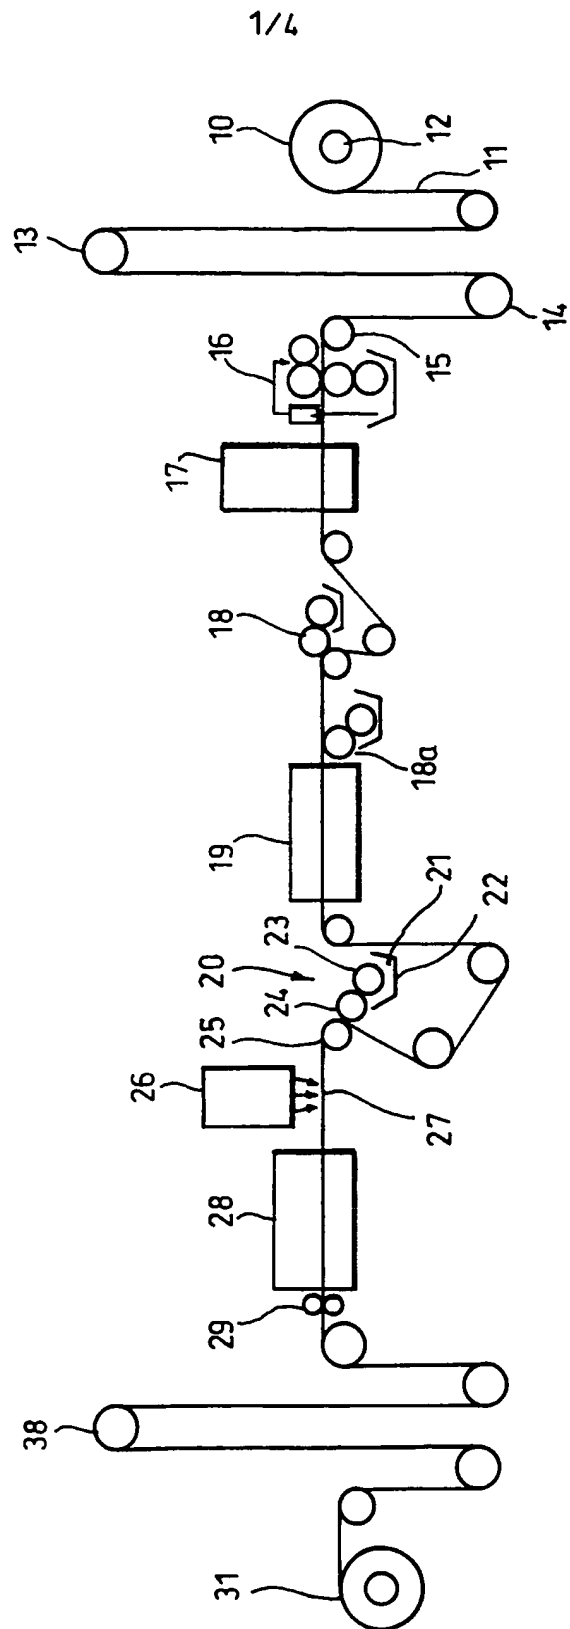


Fig.1.

2/4

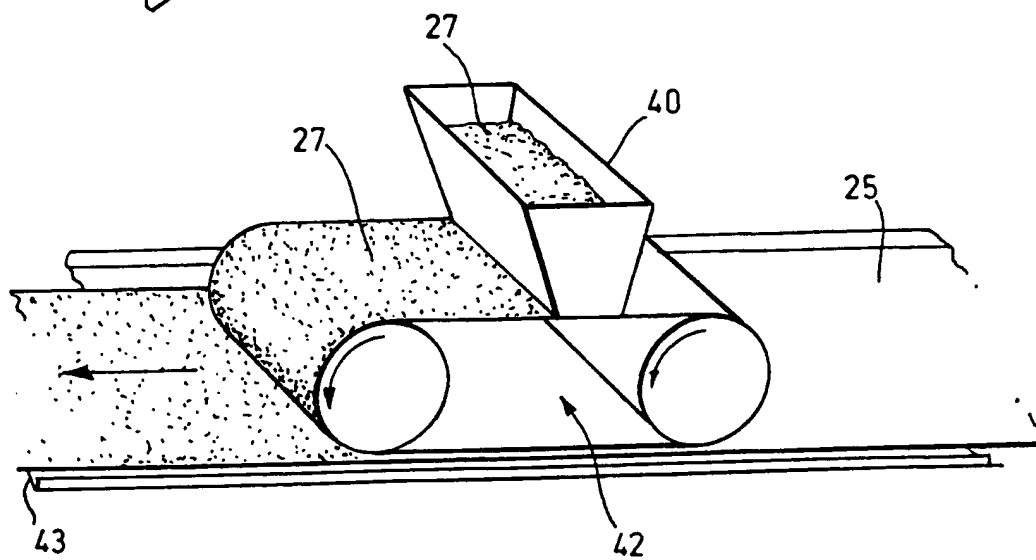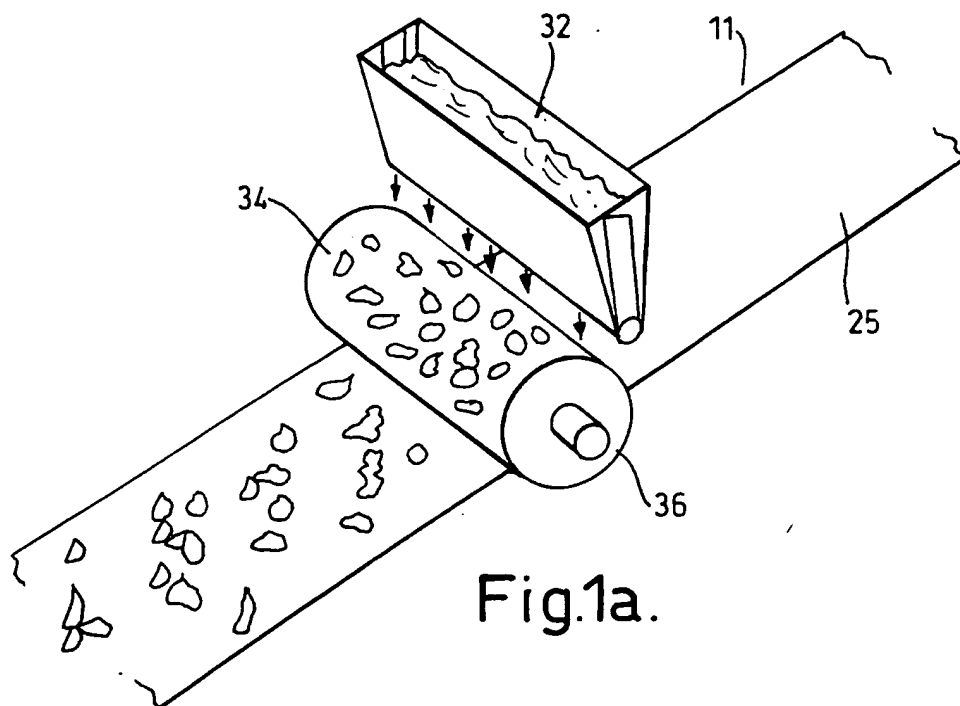

3/4

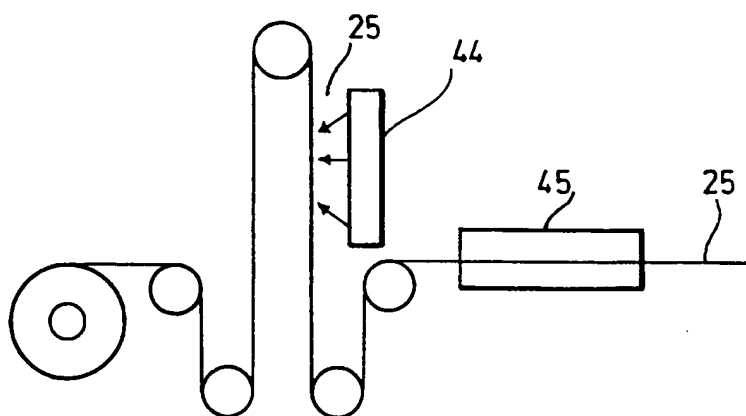


Fig.2.

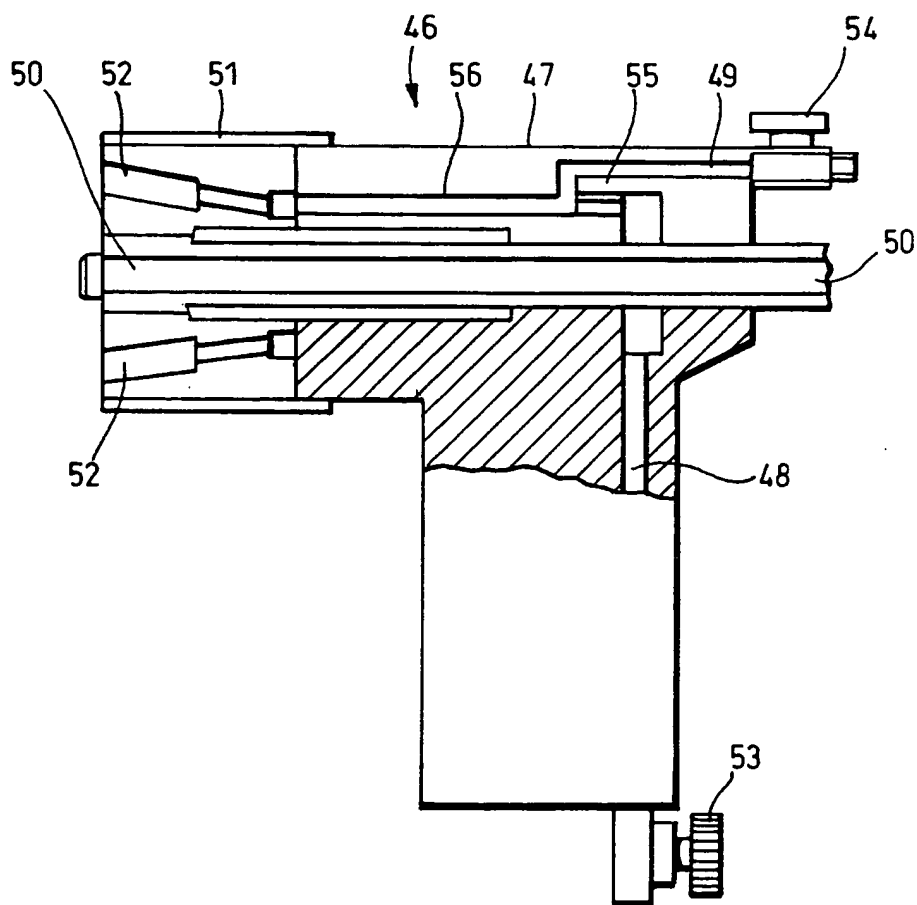


Fig.3.

4/4

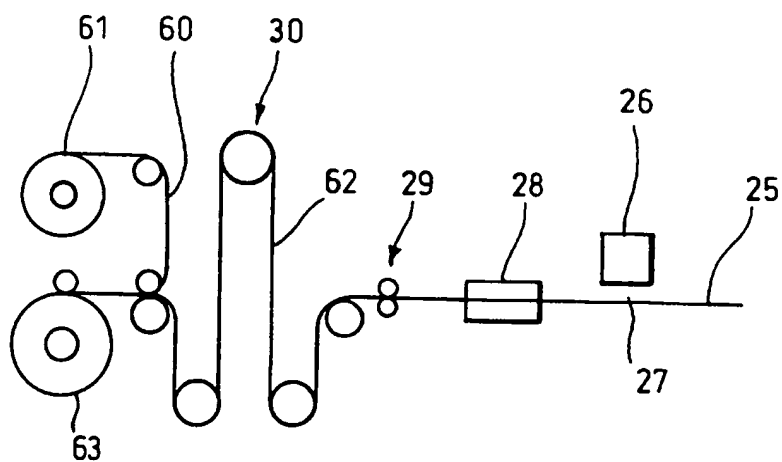


Fig.4.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/71834 A3

- (51) International Patent Classification⁷: **B05C 19/04**, B05D 1/30
- (74) Agents: **SABOURIN, Anne, Gerry et al.**; BASF Corporation, 26701 Telegraph Road, Southfield, MI 48034-2442 (US).
- (21) International Application Number: **PCT/US00/14487**
- (22) International Filing Date: **25 May 2000 (25.05.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **09/320,049** 26 May 1999 (26.05.1999) **US**
- (71) Applicant (for all designated States except US): **BASF CORPORATION** [US/US]; Sabourin, Anne, Gerry, Patent Department, 26701 Telegraph Road, Southfield, MI 48034-2442 (US).
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:
— with international search report
- (88) Date of publication of the international search report: **27 September 2001**
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **METAL ROOFING SHINGLE STOCK AND METHOD FOR MAKING IT**

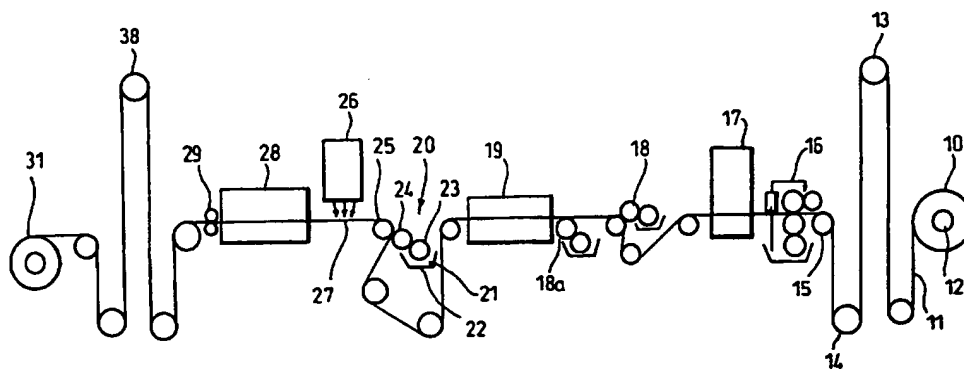

(57) Abstract: This invention relates to a method for embedding a multiplicity of discrete masses of material in a resinous coating on a sheet of metal in a coil coating system. The sheet is coated, the masses are embedded in the wet resinous coating, and the coating is dried in a one-pass system. The resinous coating and the embedded masses are preferably resistant to ultra-violet radiation. The wet resinous coating, therefore, is preferably a liquid fluorocarbon resin. The discrete masses comprise pigmented particulate minerals and resins in the form of granules, beads, vesiculated beads, pellets, flakes, platelets, cylinders, coating powders, and coating powder precursor chips. The minerals include glass, quartz, mica, pebbles, and ceramics. The particulate resins include polyesters, acrylics, nylons, polyurethanes, polycarbonates, solid fluorocarbon resins, and solid mixtures of a fluorocarbon resin and an acrylate or methacrylate polymer or copolymer. Sheet metal decorated in such a manner is useful as stock in the manufacture of metal roofing shingles simulating the appearance of traditional asphalt shingles.

WO 00/71834 A3

INTERNATIONAL SEARCH REPORT

Int. .tional Application No

PCT/US 00/14487

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B05C19/04 B05D1/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 B05C B05D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 969 251 A (ROSENBERG DAVID E ET AL) 13 November 1990 (1990-11-13) column 1, line 55-60 column 2, line 21-44 column 3, line 38-41 column 5, line 7-10,51-60 claims 1,9 ---	1,7-10, 16,18, 19,22-25
X	EP 0 857 769 A (ATOCHEM NORTH AMERICA ELF) 12 August 1998 (1998-08-12) page 4, line 48 -page 5, line 20 ---	1-4,6,8, 12,16
X	US 4 265 938 A (JACK STANTON E ET AL) 5 May 1981 (1981-05-05) column 2, line 40-66 column 4, line 64 -column 5, line 11 column 8, line 29-40 --- -/--	1,7-9,16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

21 February 2001

Date of mailing of the international search report

28/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
 Fax: (+31-70) 340-3016

Authorized officer

Slembrouck, I

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/14487

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 786 705 A (KOLESKE JOSEPH V) 22 November 1988 (1988-11-22) column 15, line 25-32 column 17, line 25-39 ---	1,8,9
X	DE 32 44 714 A (GLYCO METALL WERKE) 7 June 1984 (1984-06-07) claim 1 page 5, line 12-30 page 6, line 4-14 page 6, line 32 -page 7, line 6 ---	1,8
A	US 5 657 603 A (GOODHART ROBERT R ET AL) 19 August 1997 (1997-08-19) column 10, line 32-57; claims 1,6,7; figures 17-20 ---	1
A	US 3 720 031 A (WILSON R ET AL) 13 March 1973 (1973-03-13) column 2, line 28-31; figure 11 ---	17
A	EP 0 369 477 A (COLUMBUS SYSTEM PATENT AG) 23 May 1990 (1990-05-23) claim 5 -----	14,17,27

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/14487

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4969251	A	13-11-1990	US 4821400 A	18-04-1989
EP 0857769	A	12-08-1998	AU 5287798 A	13-08-1998
			CA 2225579 A	07-08-1998
			CN 1193643 A	23-09-1998
			JP 11005939 A	12-01-1999
			NZ 329700 A	29-03-1999
			SG 64472 A	27-04-1999
US 4265938	A	05-05-1981	AU 525826 B	02-12-1982
			AU 5098779 A	27-03-1980
			BR 7906008 A	09-09-1980
			DE 2966829 D	26-04-1984
			EP 0009253 A	02-04-1980
			ES 484322 D	16-12-1980
			ES 8101927 A	01-04-1981
			ES 490980 D	16-03-1981
			ES 8103669 A	16-06-1981
			JP 1417008 C	22-12-1987
			JP 55044899 A	29-03-1980
			JP 62009023 B	26-02-1987
			NO 793015 A,B,	24-03-1980
			US 4340273 A	20-07-1982
US 4786705	A	22-11-1988	US 4707535 A	17-11-1987
			CA 1246591 A	13-12-1988
			EP 0139042 A	02-05-1985
DE 3244714	A	07-06-1984	NONE	
US 5657603	A	19-08-1997	US 5495654 A	05-03-1996
			US 5953810 A	21-09-1999
			CA 2146676 A	09-10-1995
US 3720031	A	13-03-1973	US 3848383 A	19-11-1974
EP 0369477	A	23-05-1990	DE 3838928 A	23-05-1990
			DK 575189 A	18-05-1990